


EMUD-2201 mPCIe to SD/uSD Module

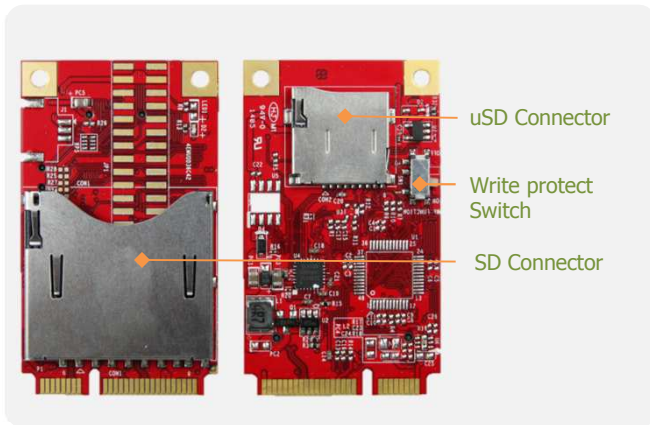


Features


- mPCIe F/F, USB 2.0 to alternative SD/uSD 2.0
- Plug & Play, SD hot swappable.
- Ultra low power consumption.
- 30μ golden finger, 3 years warranty.
- Industrial design, manufactured in innodisk Taiwan

Mechanical Drawing





EMUD-2201-C1

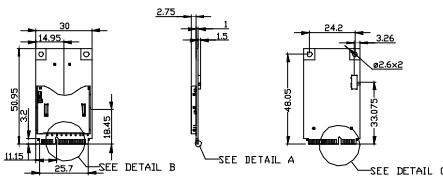

EMUD-2201-C1-01

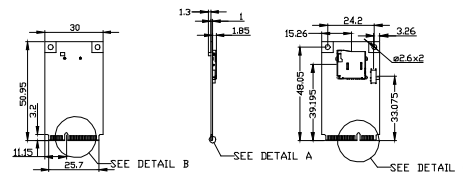

EMUD-2201-C1-02

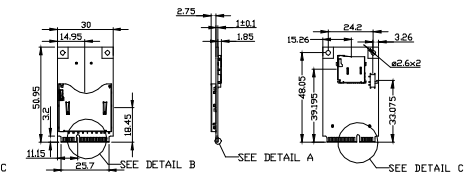

Specifications

Headquarters (Taiwan)
5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:
USA

usasales@innodisk.com
+1-510-770-9421

Europe
eusales@innodisk.com
+31-040-282-1818

Japan
jpsales@innodisk.com
+81-45-594-7581

China
sales_cn@innodisk.com
+86-755-21673689

Form-Factor	mPCIe
Input I/F	USB 2.0
Output I/F	SD 2.0
Output Connector	SD x 1, uSD x 1 (alternative)
TDP	1.8W (3.3V x 550mA)
Dimension (WxLxH)	30 x 50.95 x 5.6 Weight: 8g
Temperature	Operation: STD: 0°C ~ +70°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

May 22, 2015

Order Information

EMUD-2201-C1
mPCIe to SD Module
EMUD-2201-C1-01
mPCIe to uSD Module
EMUD-2201-C1-02
mPCIe to SD/uSD Module