


ES4S-2101


IDE to mSATA & mSATA mini 2.5" Module

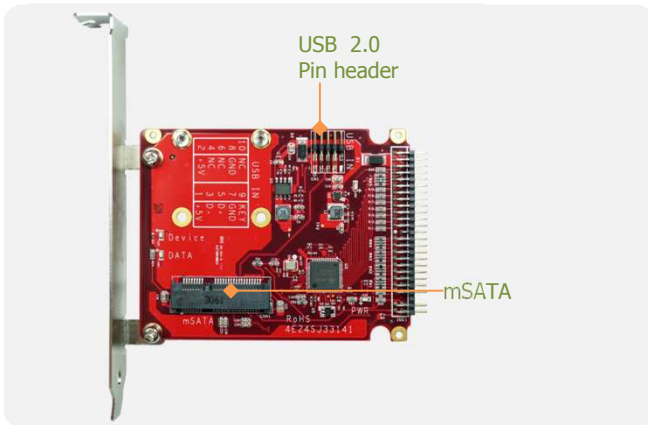

Features

- Supports mSATA & mSATA mini card to IDE in 2.5" F/F.
- Supports mPCIe card with USB 2.0.
- Compliance with Gen1i/Gen1m of Serial ATA II Electrical Specification 2.6.
- Supports wide temp.
- 3 years warranty.
- Industrial design, manufacture in innodisk Taiwan

Mechanical Drawing

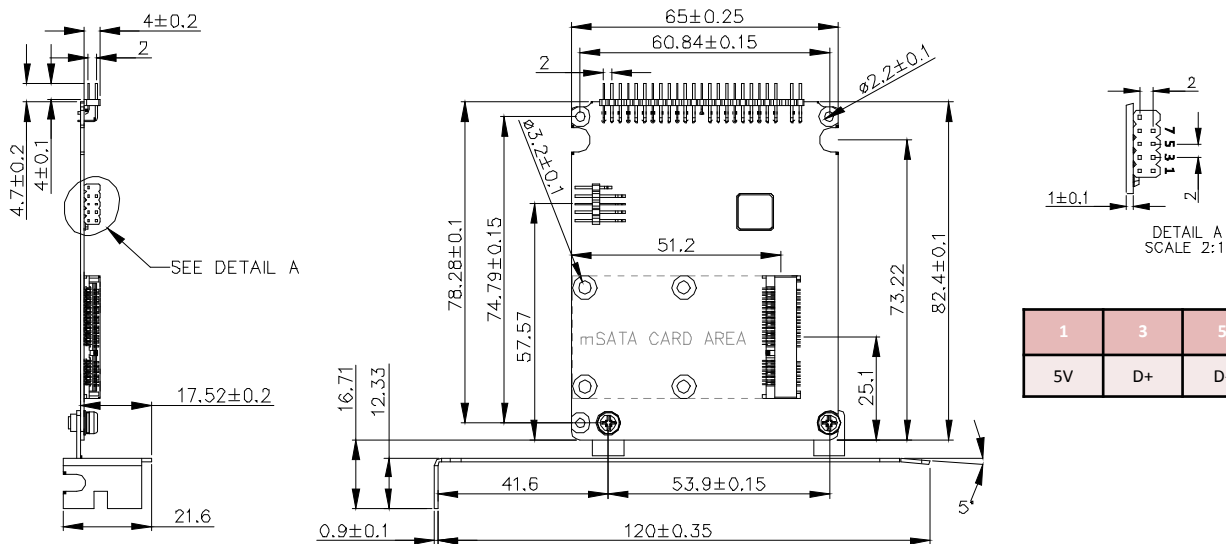

Specifications

Form-Factor	2.5" SSD
Input I/F	IDE, USB 2.0
Output I/F	SATA II, USB 2.0
Output Connector	mSATA x 1
TDP	1.5W (5V x 300mA)
Dimension (WxLxH)	65 x 82.4 x 4mm, Weight: 44.5g
Temperature	Operation: STD: 0°C ~ +70°C WT: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

Headquarters (Taiwan)
 5F., No. 237, Sec. 1, Datong Rd.,
 Xizhi Dist., New Taipei City 221,
 Taiwan
 Tel: +886-2-77033000
 Email: sales@innodisk.com

Branch Offices:
USA
usasales@innodisk.com
 +1-510-770-9421

Europe
eusales@innodisk.com
 +31-040-282-1818

Japan
jpsales@innodisk.com
 +81-45-594-7581

China
sales_cn@innodisk.com
 +86-755-21673689

www.innodisk.com

© 2014 Innodisk Corporation.
 All right reserved. Specifications
 are subject to change without
 prior notice.

May 22, 2015

Order information

- ES4S-2101-C1**
IDE to mSATA & mSATA mini 2.5" Module, ST
- ES4S-2101-W1**
IDE to mSATA & mSATA mini 2.5" Module, WT