

Datasheet

1.8" SATA SSD

3SE3-P series

- 1.8" SATA III solution for industrial field
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Enhanced power cycling management




Introduction

Innodisk 1.8" SATA SSD 3SE3-P is SATA III 6Gb/s Flash based disk, which delivers excellent performance and reliability, making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. 1.8" SATA SSD 3SE3-P not only performs unmatched performance, but is also designed with Innodisk-owned technical know-how to ensure data integrity and the highest level of reliability.

1.8" SATA SSD

3SE3-P series

Drawing

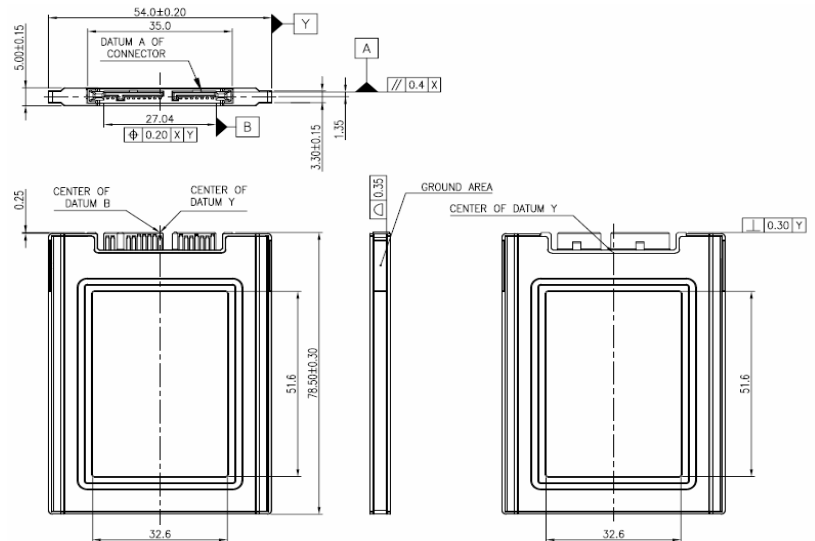

Specifications

Interface	SATA III
Flash Type	SLC
Capacity	8GB-512GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	490 / 230
Max. Power Consumption	1.5 W (5V x 300 mA)
Thermal Sensor	ST- Optional/ WT- Default
External DRAM Buffer	✓
H/W Write Protect	-
Pin7 Power	-
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	54.0 X 78.5 X 5.00 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +150°C (based on Toshiba datasheet specification) MTBF: 3 million hours

Contact us for more information about the 1.8" SATA SSD 3SE3-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-040-282-1818
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2016 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Ordering Information

20160830

Operation Temp.	8GB	16GB	32GB	64GB	128GB	256GB	512GB
Standard Grade (0°C ~ +70°C)	DES18-08GD70SCAQB	DES18-16GD70SCAQB	DES18-32GD70SCAQB	DES18-64GD70SCAQB	DES18-A28D70SCAQB	DES18-B56D70SCAQB	DES18-C12D70SCAQT
Industrial Grade (-40°C ~ +85°C)	DES18-08GD70SWAQB	DES18-16GD70SWAQB	DES18-32GD70SWAQB	DES18-64GD70SWAQB	DES18-A28D70SWAQB	DES18-B56D70SWAQB	DES18-C12D70SWAQT

innodisk

www.innodisk.com