


Datasheet

mSATA 3IE series

- SATA 6Gb/s interface
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Zero mechanical interference
- Anti-vibration mechanical design
- JEDEC standard MO-300 dimension

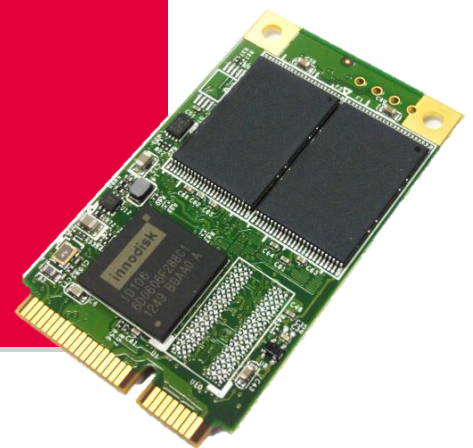

Introduction

Innodisk mSATA 3IE is designed with mSATA form factor by MO-300/MO-300B which established by JEDEC, and support SATA III standard (6.0Gb/s) with excellent performance. Regarding of mechanical interference, Innodisk mSATA 3IE absolutely replaces the traditional hard disk and makes personal computer, in any field, smaller and easier.


Innodisk mSATA 3IE effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD), and complies with ATA protocol, no additional drives are required, and can be configured as a boot device or data storage device.

mSATA 3IE series

Contact us for more information
about the mSATA 3IE.

Innodisk is a service-driven provider of industrial embedded flash storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Diagram

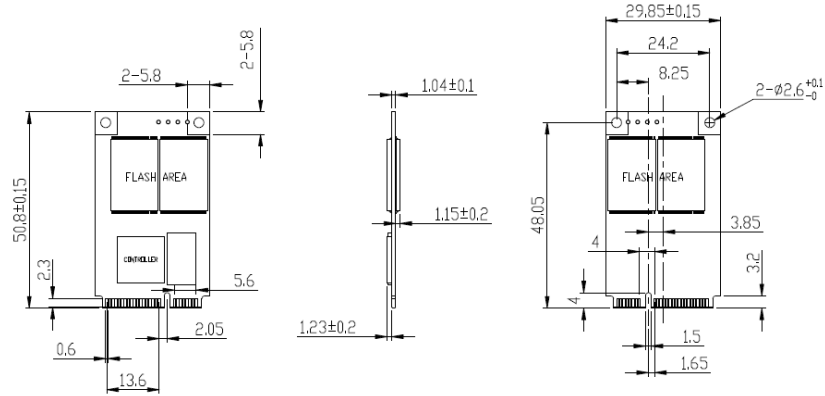

Specifications

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221
Tel: +886-2-77033000
Email: sales@Innodisk.com

Branch Offices:

USA
usasales@Innodisk.com
+1-510-770-9421
Europe
eusales@Innodisk.com
+31-(0)40-282-1818
Japan
jpsales@Innodisk.com
+81-45-594-7581
China
sales_cn@Innodisk.com
+86-755-21673689
www.Innodisk.com

© 2015 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Interface	SATA III
Flash Type	iSLC
Capacity	4GB~64GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	460/350
Max. Power Consumption	1.3 W (3.3V x 390 mA)
Thermal Sensor	WT only
External DRAM buffer	-
H/W Write Protect	-
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	29.8 X 50.8 X 3.49 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

20150209

Ordering Information

Operation Temp.	4GB	8GB	16GB	32GB	64GB
Standard Grade (0°C ~ +70°C)	DHMSR-04GD073C2SC	DHMSR-08GD063C2DC	DHMSR-16GD063C2QC	DHMSR-32GD063C2QC	DHMSR-64GD063C2QC
Industrial Grade (-40°C ~ +85°C)	DHMSR-04GD072W2SC	DHMSR-08GD062W2DC	DHMSR-16GD062W2QC	DHMSR-32GD062W2QC	DHMSR-64GD062W2QC

innodisk

www.Innodisk.com